



### Box Properties

--Description--

Name:

Type: Closed Box

Shape: Prism, square

--Box Parameters--

Vb = 2 cu.ft

V(total) = 2.181 cu.ft

Qtc = 1.045

F3 = 38.01 Hz

Fill = none

### Driver Properties

--Description--

Name: SEX 15 D4

Type: Standard one-way driver

Company: RE Audio (2015)

--Configuration--

**No. of Drivers = 1**

Dual voice coils = parallel

--Driver Parameters--

Fs = 31.53 Hz

Qms = 6.094

Vas = 2.527 cu.ft

Xmax = 1.1 in

Sd = 127 sq.in


Qes = 0.839

Re = 1.384 ohms

Le = 1.273 mH

Z = 1.66 ohms

Pe = 750 watts

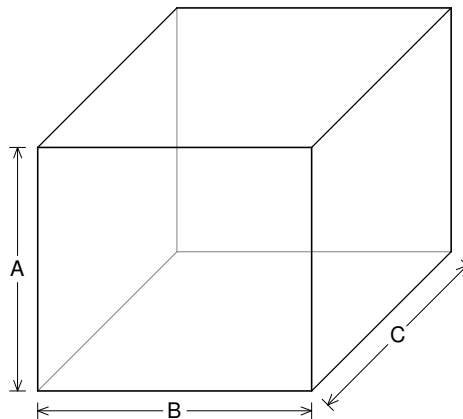

--External Dimensions--

A = 16 in

B = 18 in

C = 17.25 in

--Internal Dimensions--

A = 14.5 in




B = 16.5 in

C = 15.75 in

--Wall Thickness--

Front = 0.75 in

Side = 0.75 in

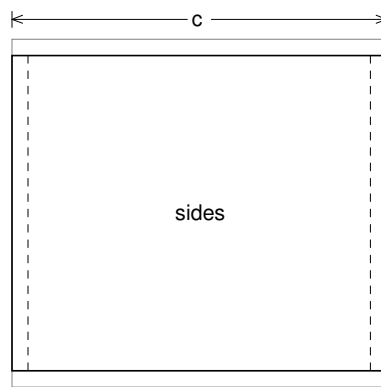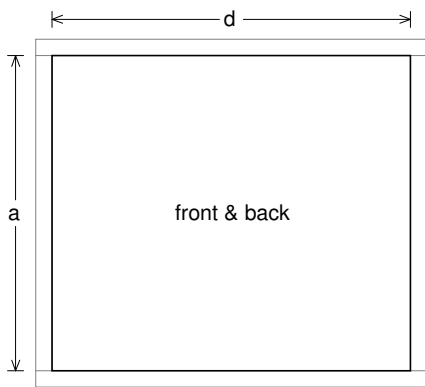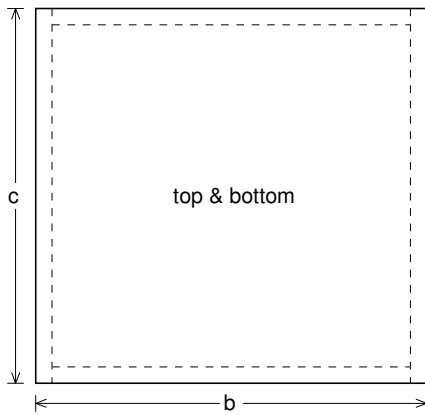

### Box Parts

Box Shape: Square Prism

1 Top, 1 Bottom: depth (c) = 17.25 in  
width (b) = 18, thickness = 0.75 in

1 Front, 1 Back: height (a) = 14.5 in  
width (d) = 16.5, thickness = 0.75 in

2 Sides: height (a) = 14.5 in  
depth (c) = 17.25, thickness = 0.75 in

--Driver Mounting--  
Mounting: Front



### Wiring Diagram

